


# Combiner

300 - 470 and 880 - 960 MHz

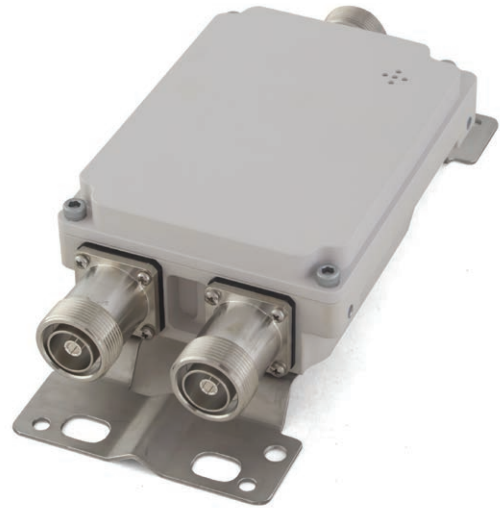

## PRODUCT FEATURES

- High Performance
- High Reliability
- RoHS Compliant

ARTICAL		COMD-0409-A0XX	
ELECTRICAL	LOW	HIGH	
FREQUENCY RANGE	300 - 470 MHz	880 - 960 MHz	
INSERTION LOSS	≤ 0.5 dB		
RETURN LOSS	≥ 18 dB		
ISOLATION	≥ 50 dB		
POWER	200 W		
PIM	150 dBc		
IMPEDANCE	50 Ohm		
ENVIRONMENTAL			
OPERATIONAL TEMPERATURE	-40 to +65°C		
MECHANICAL			
DIMENSIONS, (excluding brackets)	275 x 108 x 49 mm		
RF CONNECTORS	DIN female		
FINISH	Grey colour		

## OUTLINE DRAWING

